


SPROCKETS



- 01 마모와 부하에 강한 재질
- 02 적은 소음
- 03 MC Nylon, Polyamide 등
여러가지 재질

07

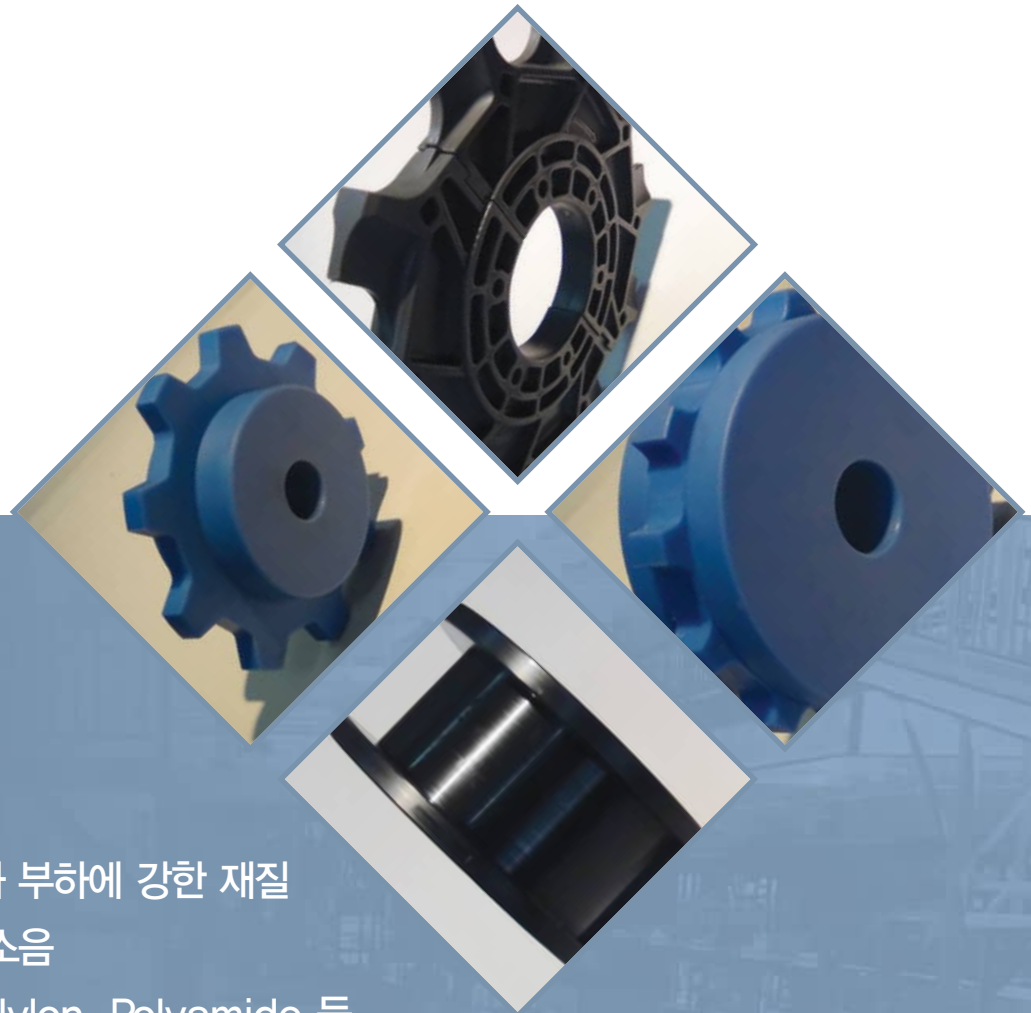

STEEL TABLE TOP AND PLATE TOP CHAINS




CHAIN SPROCKETS

[SUS 직선 사출형]


TABLE TOP CHAIN
MATTOP CHAIN
CONVEYOR COMPONENT

SPROCKET

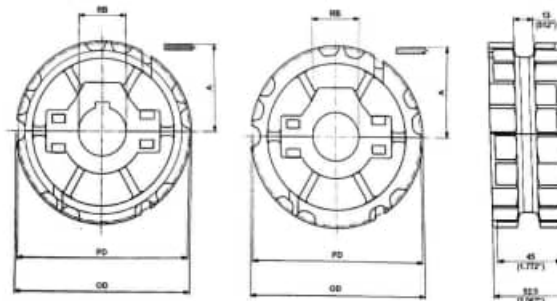

Nr. of teeth	Bore DF	Pitch Dia. DE	Outside Dia. DP	A	Code
	mm	mm	mm		
21	25				1185
	30	129.3	129.5	67.8	1188
	35				1187
23	25				1188
	30	141.2	142.0	73.8	1189
	35				1190
25	25				1191
	30	153.2	154.2	79.8	1192
	35				1193


IDLER WHEEL



Nr. of teeth	Bore DF	A	Outside Dia. DE	Code
	mm	mm	mm	
21	25			1194
	30	68.6	129	1195
	35			1196
23	25			1197
	30	74.6	141	1198
	35			1199
25	25			1200
	30	80.5	153	1201
	35			1202


CHAIN SPROCKETS [SUS 직선 가공형]

PLASTIC SINGLE HINGE

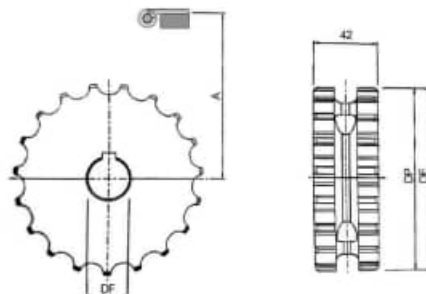

Nr. of teeth	Bore DF	Pitch Dia. DE	Outside Dia. DP	A	Code
	mm	mm	mm		
	25				1203
21	30	129.0	129.3	67.8	1204
	35				1205
	25				1206
23	30	141.0	142.2	73.8	1207
	35				1208
	25				1209
25	30	154.0	154.2	79.8	1210
	35				1211

IDLER WHEEL




Nr. of teeth	Bore DF	A	Outside Dia. DE	Code
	mm	mm	mm	
	25			1212
21	30	68.6	129	1213
	35			1214
	25			1215
23	30	74.6	141	1216
	35			1217
	25			1218
25	30	80.5	153	1219
	35			1220

CHAIN SPROCKETS


TABLE TOP CHAIN
MATTOP CHAIN
CONVEYOR COMPONENT

STAINLESS SINGLE HINGE

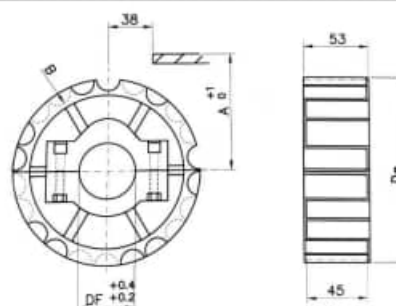

Nr. of teeth	Bore DF	Pitch Dia. DE	Outside Dia. DP	A	Code
	mm	mm	mm		
21	25				1221
	30	129.3	129.5	67.8	1222
	35				1223
23	25				1224
	30	141.2	142.0	73.8	1225
	35				1226
25	25				1227
	30	153.2	154.2	79.8	1228
	35				1229


IDLER WHEEL

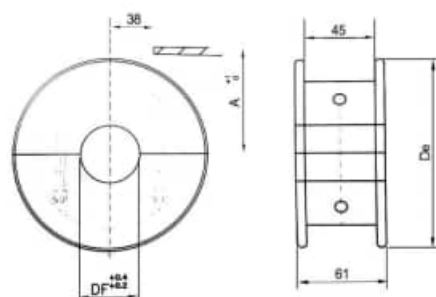

Nr. of teeth	Bore DF	A	Outside Dia. DE	Code
	mm	mm	mm	
21	25			1230
	30	68.6	129	1231
	35			1232
23	25			1233
	30	74.6	141	1234
	35			1235
25	25			1236
	30	80.5	153	1237
	35			1238


CHAIN SPROCKETS [PLASTIC 직선 가공형]

SPROCKET

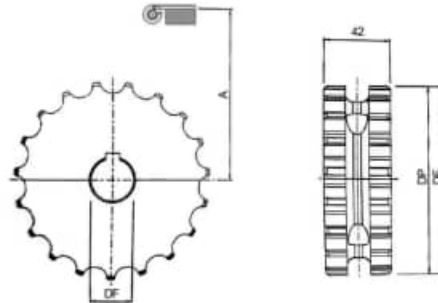

Nr. of teeth	Bore DF	Pitch Dia. DE	Outside Dia. DP	A	Code
	mm	mm	mm		
	25				1239
21	30	129.0	129.3	67.8	1240
	35				1241
	25				1242
23	30	141.0	142.2	73.8	1243
	35				1244
	25				1245
25	30	154.0	154.2	79.8	1246
	35				1247

IDLER WHEEL




Nr. of teeth	Bore DF	A	Outside Dia. DE	Code
	mm	mm	mm	
	25			1248
21	30	68.6	129	1249
	35			1250
	25			1251
23	30	74.6	141	1252
	35			1253
	25			1254
25	30	80.5	153	1255
	35			1256

CHAIN SPROCKETS

[PLASTIC 곡선 가공형(882)]


TABLE TOP CHAIN
MATTOP CHAIN
CONVEYOR COMPONENT

SPROCKET



Nr. of teeth	Bore DF	Pitch Dia. DE	Outside Dia. DP	A	Code
	mm	mm	mm		
10	25				1294
	30	123.3	122	66.3	1295
	35				1296
11	25				1297
	30	135.2	134	72.4	1298
	35				1299
12	25				1300
	30	147.2	146	78.4	1301
	35				1302



IDLER WHEEL



Nr. of teeth	Bore DF	A	Outside Dia. DE	Code
	mm	mm	mm	
10	25			1303
	30	68.6	129.8	1304
	35			1305
11	25			1306
	30	74.6	142.2	1307
	35			1308
12	25			1309
	30	80.5	154.7	1310
	35			1311

CHAIN SPROCKETS [PLASTIC 곡선 가공형]

SPROCKET



Nr. of teeth	Bore DF	Pitch Dia. DE	Outside Dia. DP	A	Code
	mm	mm	mm		
10	25				1312
	30	123.3	122	65.3	1313
	35				1314
11	25				1315
	30	135.2	134	71.2	1316
	35				1317
12	25				1318
	30	147.2	146	77.2	1319
	35				1320

IDLER WHEEL




Nr. of teeth	Bore DF	A	Outside Dia. DE	Code
	mm	mm	mm	
10	25			1321
	30	68.8	129.8	1322
	35			1323
11	25			1324
	30	74.6	142.2	1325
	35			1326
12	25			1327
	30	80.5	154.7	1328
	35			1329

CHAIN SPROCKETS

[SUS, PLASTIC 직선 더블가공형]


TABLE TOP CHAIN
MATTOP CHAIN
CONVEYOR COMPONENT

SPROCKET

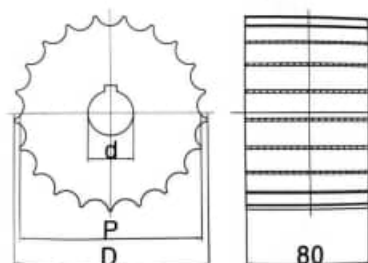

Nr. of teeth	Bore DF	Pitch Dia. DE	Outside Dia. DP	A	Code
	mm	mm	mm		
21	25				1366
	30	129.0	129.3	67.8	1367
	35				1368
23	25				1369
	30	141.0	142.2	73.8	1370
	35				1371
25	25				1372
	30	154.0	154.2	79.8	1373
	35				1374


IDLER WHEEL

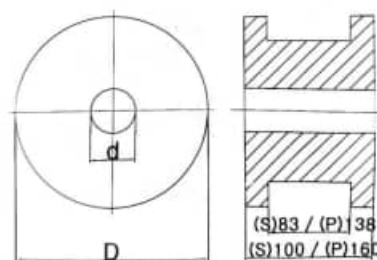

Nr. of teeth	Bore DF	A	Outside Dia. DE	Code
	mm	mm	mm	
21	25			1375
	30	68.6	129	1376
	35			1377
23	25			1378
	30	74.6	141	1379
	35			1380
25	25			1381
	30	80.5	153	1382
	35			1383


CHAIN SPROCKETS [SUS 직선 곡선 가공형]

SPROCKET (분리형)

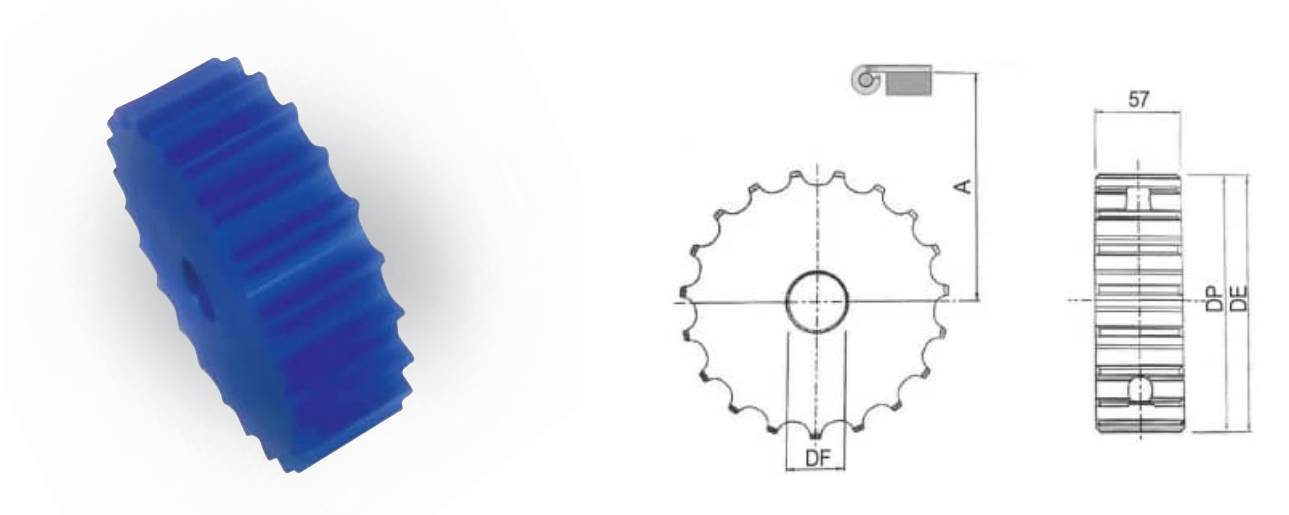

Nr. of teeth	Pitch Dia. DE	Outside Dia. DP	A	Code
	mm	mm		
17	103.9	105.5	55.9	1393
19	117.0	117.3	61.9	1394
21	129.0	129.3	67.8	1395
23	142.0	142.2	73.8	1396
25	154.0	153.2	79.8	1397
27	166.8	165.2	85.8	1398
29	178.5	177.2	91.8	1399

FOR SUS CHAIN SPROCKET MC 가공 일체형(ONE BODY TYPE)

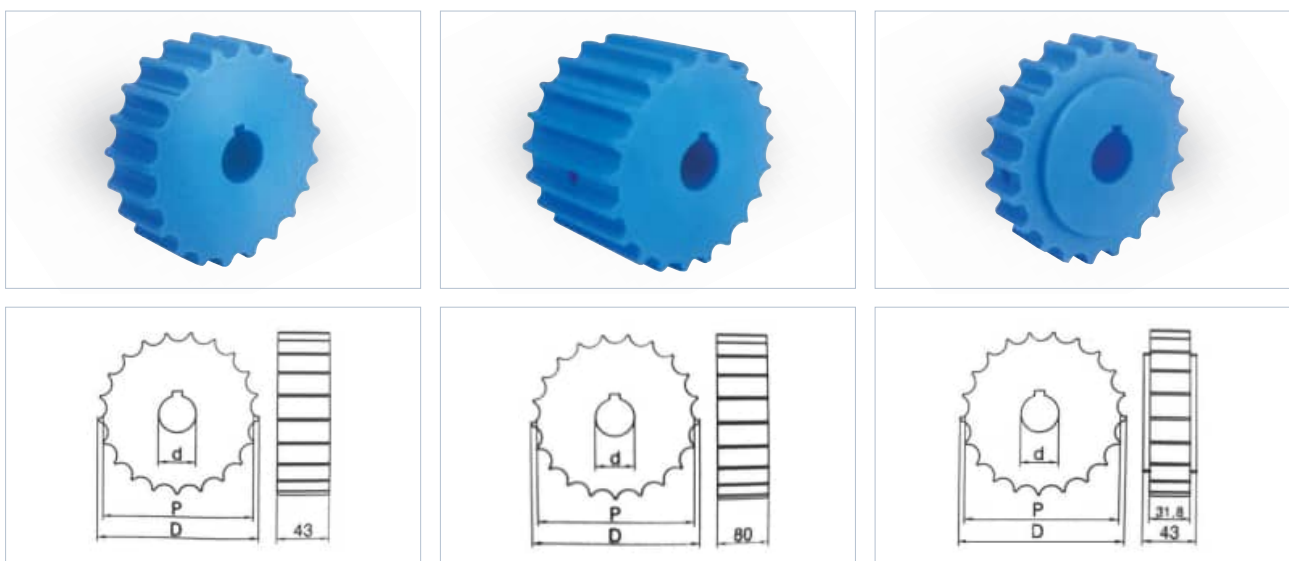


FOR SINGLE HINGE CHAIN

FOR DOUBLE HINGE CHAIN


FOR TAB/BEV CHAIN

SPROCKET (카바타입)

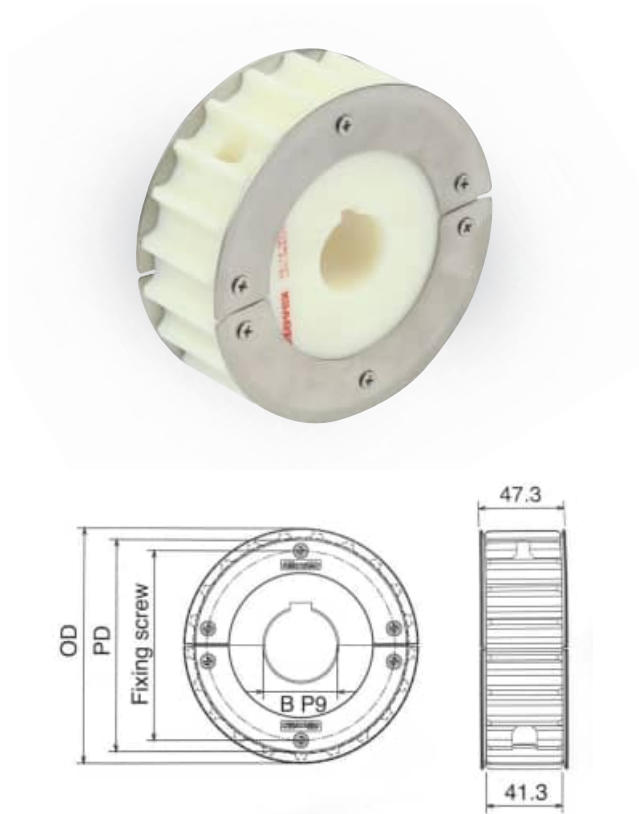

Z-	Bore	PD	OD	θscrew
21	25	129.3	129.0	104.0
	30			
	35			
	40			
23	25	141.2	142.0	116.0
	30			
	35			
	40			
25	25	153.2	154.0	128.0
	30			
	35			
	40			


SPROCKET (분리형 카바타입)

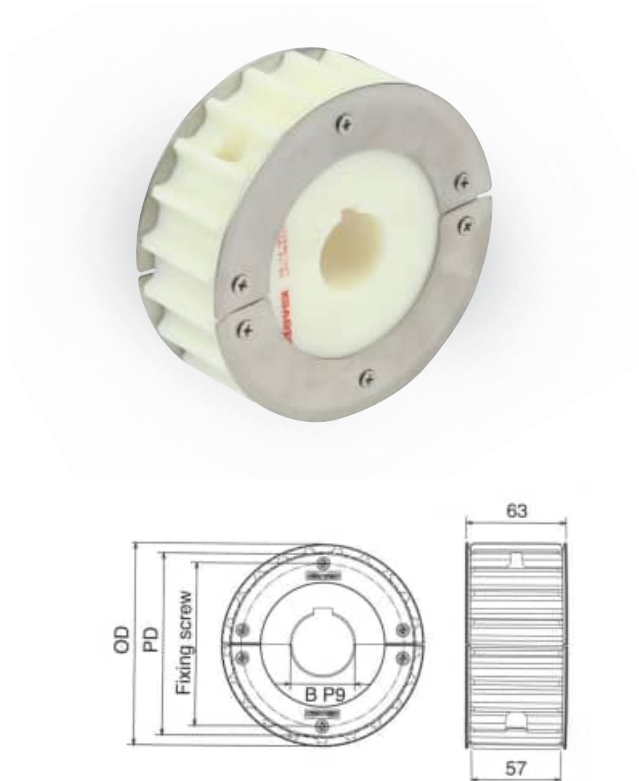

Z-	Bore	PD	OD	θscrew
21	25	129.3	129.0	104.0
	30			
	35			
	40			
23	25	141.2	142.0	116.0
	30			
	35			
	40			
25	25	153.2	154.0	128.0
	30			
	35			
	40			


CHAIN SPROCKET

SPROCKET (카바타입)

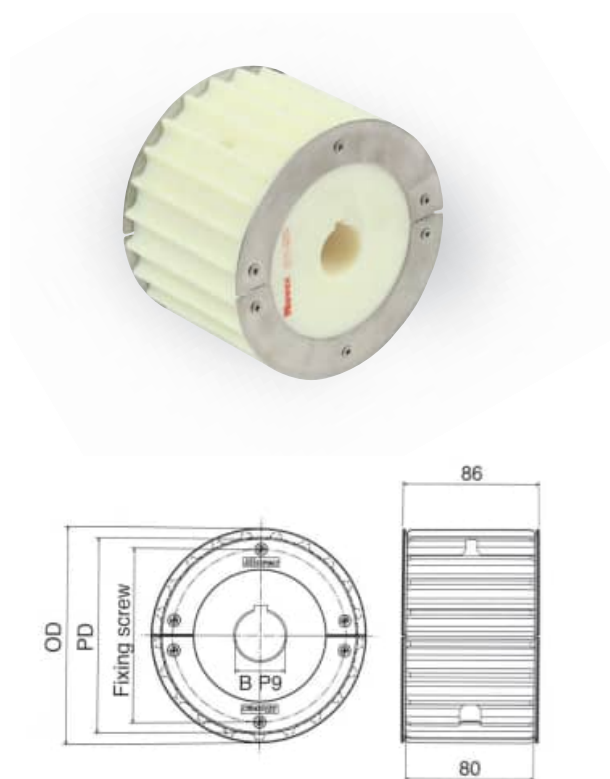

Z-	Bore	PD	OD	θscrew
21	25	129.3	129.0	104.0
	30			
	35			
	40			
23	25	141.2	142.0	116.0
	30			
	35			
	40			
25	25	153.2	154.0	128.0
	30			
	35			
	40			

CASS CONVEYOR(CC600)

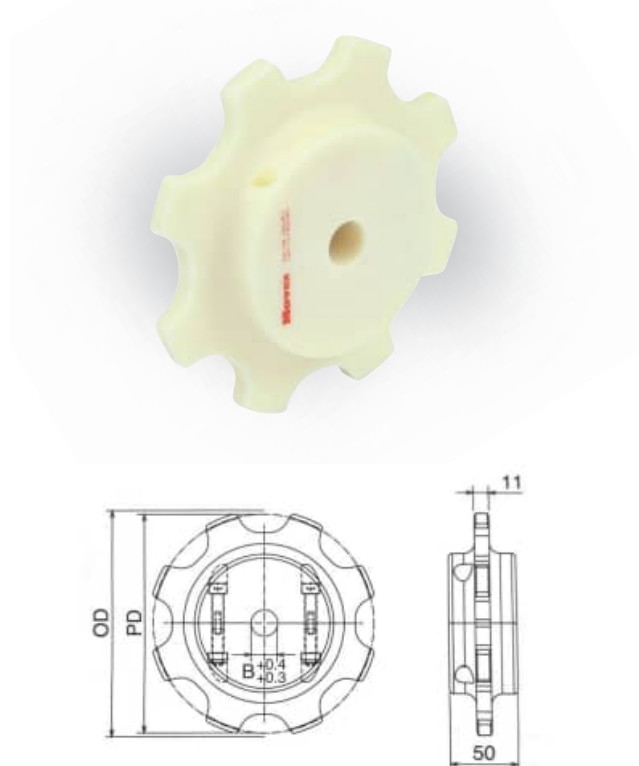


Z-	Bore	PD	OD
8	20	172.0	166.0
10	20	215.0	205.0
12	20	256.0	246.0
14	20	297.0	286.0

P 43



CHAIN SPROCKET (A600 TAB용)

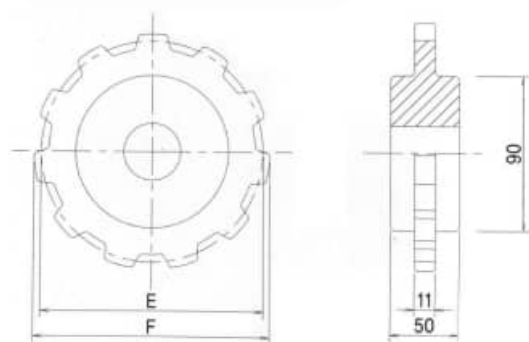


적용체인	잇수	피치원지름(E) mm	외경(F) mm
	8	161.5	165.1
DSA600S	10	200.1	206.6
DSA600CVT	12	239.0	247.6
	14	278.1	292.1
DSA1400CVT	10	266.9	295.3


- 형상 : 일체형
- 재질 : MC Nylon

CHAIN SPROCKETS [SUS 직선 곡선 가공형]

FOR PLASTIC MULTIFLEX CHAIN(PR, PRT)

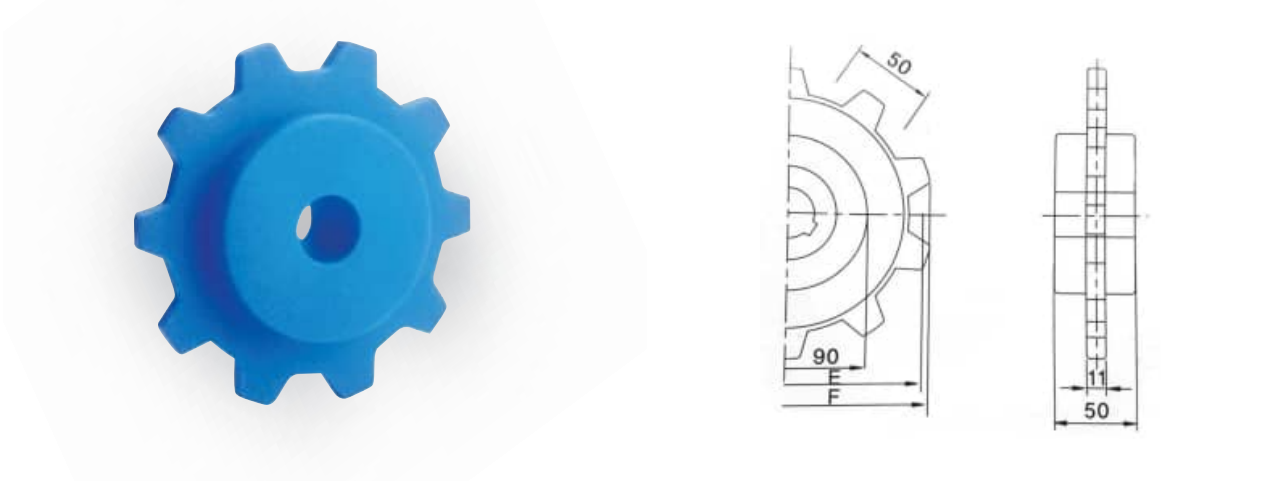				
Nr. of teeth	Bore DF	Pitch Dia. DE	Outside Dia. DP	Code
	mm	mm	mm	
8	25/30/35/40	130.6	136	1384
10	25/30/30/30/35/40	161.8	165	1385
11	25/30/35/40	193.2	196	1386
12	25/30/35/40	224.7	227	1387

IDLER WHEEL(PR, PRT)

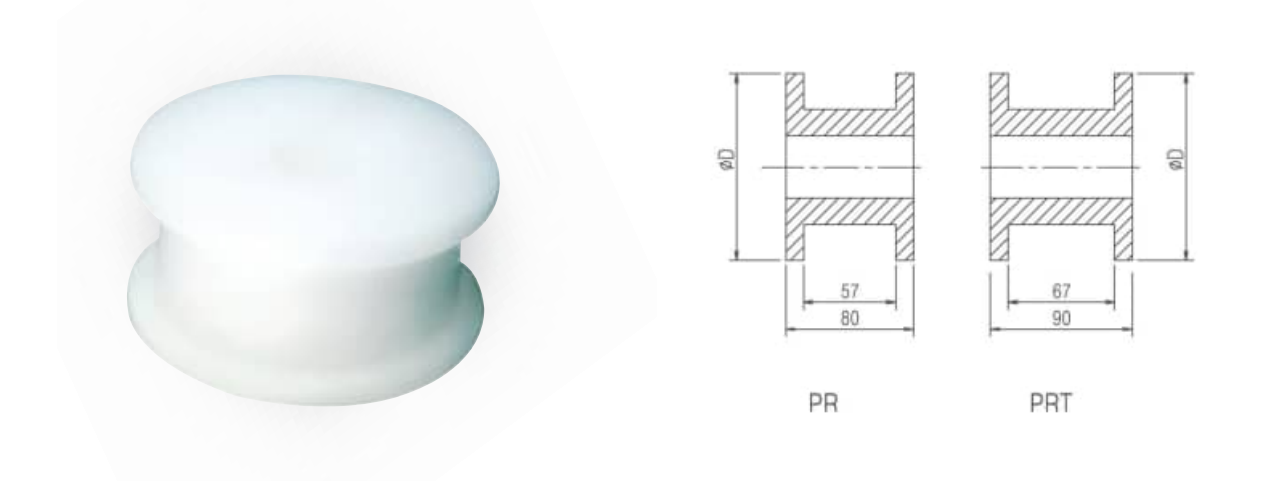
				
Nr. of teeth	Bore DF	Pitch Dia. DE	Outside Dia. DP	Code
	mm	mm	mm	
8	25/30/35/40	136	1.0	1389
10	25/30/30/30/35/40	165	1.8	1390
11	25/30/35/40	196	2.6	1391
12	25/30/35/40	227	3.2	1392

CHAIN SPROCKETS

[600, 1400 가공형]

TABLE TOP CHAIN
MATTOP CHAIN
CONVEYOR COMPONENT



SPROCKET

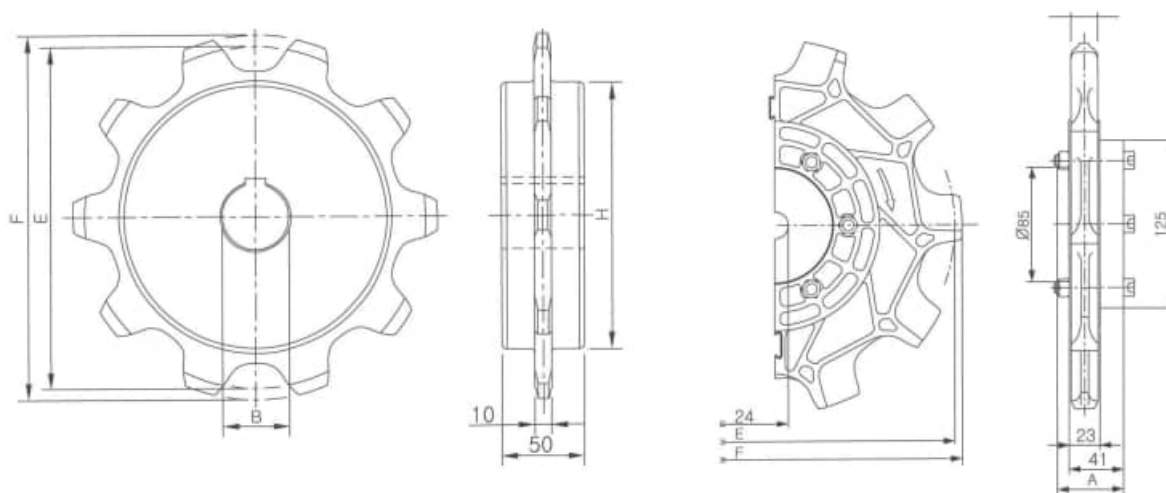

Nr. of teeth	Teeth	Pitch Dia. DE	Outside Dia. DP	Code
		mm	mm	
600	8	161.5	165.1	1400
	10	200.1	206.6	1401
	12	239.0	247.6	1402
1400	10	266.9	278.4	1403

CORNER TRACKS

TAB TYPE

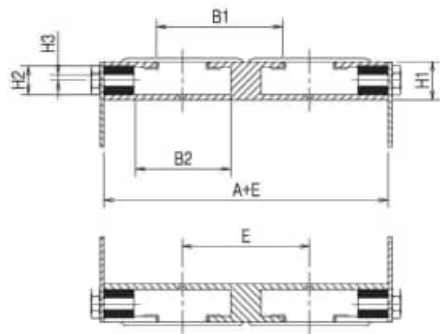

1열

체인타입	Width	B1	B2	H1	H2	H3	곡률반경 A1	A
P825/S825	100						500	100
P1143/S1143	125	45	70	25	18	9.5	610	125
S1905	200						610	200
P1905	200						610	200
P2540	265	58	90	32	26	16	610	265
P3048	320						610	320
LBP953	125	58	90				670	125
PT826	100							100
PT1143	15							125
PT1905	200	34.6	60	32	26	19	160	200
PT2540	265							265
PT3048	320							320
PRT	90	58	70	25	18	9	890 1100	
A600	80	47	60	32	25	5	700	80

2열


체인타입	Width	B1	B2	H1	H2	H3	곡률반경 R1 R2	e	A
P825/S826	185						500 585	85	100
P1143/S1143	245	45	70	26	18	9.5	500 620	120	125
S1143							610 730		
S1905	395						610 805	195	200
P1905	395						805	195	200
P2540	525	58	90	32	26	16	610 870	260	285
P3048	630						920	310	320
LBP953	225						670 770	100	125
PT826	190						700	90	100
PT1143	245						730	120	125
PT1905	395	34.6	60	32	26	19	610 805	195	200
PT2540	525						870	260	265
PT3048	630						920	310	320

체인타입	W	T	L
P826	100	25	100
P1143	125		
P1905	200	32	
P2540	265		
P3048	320		

CORNER TRACKS

TABLE TOP CHAIN
MATTOP CHAIN
CONVEYOR COMPONENT

MAGNETIC TYPE


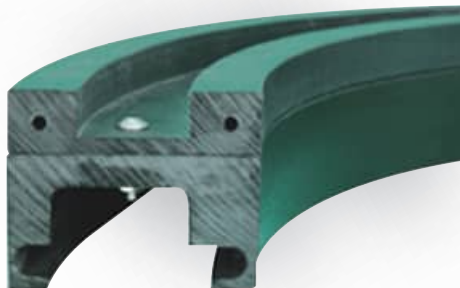


1열

적용체인번호	폭	내폭 B1	높이 H1	H2	곡률반경
826	110/111				500
1143	125/129	44.2	25	55	610
1905	214				
FTM1050	100	44.2	27	63	500

2열

적용체인번호	폭	내폭 B1	높이 H1	H2	곡률반경 R1	R2	E	A1
S826	190	44.2	27	55	550	590	90	100
	189					589	85	100
	185					585	120	100
S1143	249			60	610	560	120	129
	410					670	196	
S1905	185					708	85	214
FTM1050				63	500	585		185

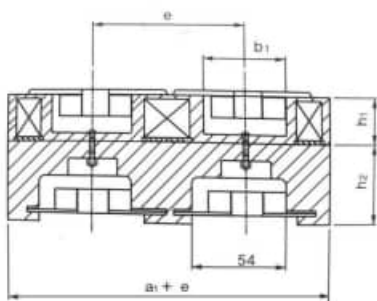



3열

적용체인번호	폭	내폭 B1	높이 H1	H2	곡률반경 R1	R2	E	A1
S826	280	44.2	27	55	550	590	90	100
	278					589	85	100
	270					585	85	100
FTM1050	270	44.2	27	63	500	585	85	100

CORNER TRACKS

BEVEL TYPE

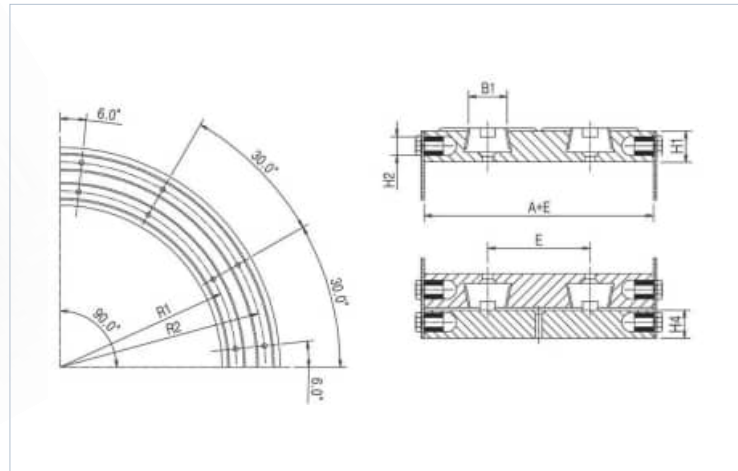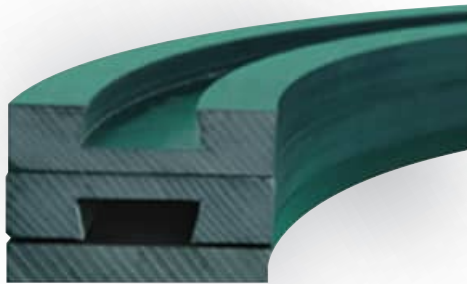


1열

체인타입	W	B1	H1	H2	H4	곡률반경 R	A
P826	100	41.4	25	18	16	500	100
P1143							
P1905	125					610	125
P2540	200					610	200


2열

체인타입	W	B1	H1	H2	H4	곡률반경 R1 R2		e	A
P826	185	41.4	25	18	16	500	585	85	100
S826									
S1143	245					610	730	120	125
S1905	395					610	805	195	200

CORNER TRACKS



878TAB • 879TAB
880TAB • 881TAB




882 BEVEL



MAGNETIC CORNER TRACKS

STRAIGHT SECTIONS



SP 3048(RS60)